


## CLASS 150

## JACKETED LIFT CHECK VALVE

Pressure-Temperature Rating:  
ASME B 16.34

150UNAJ

150UNAJM

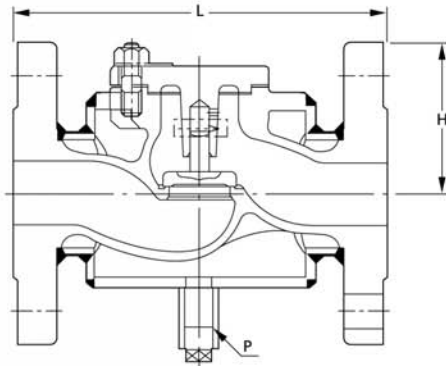

### Materials

Parts	150UNAJ	150UNAJM
Body	CF8	CF8M
Cover	CF8	CF8M
Disc	304	316
Gasket	Refer to Page 10	
Cover bolt/nut	B8/8	
Jacket*	STPG370+SS400	Carbon Steel+Steel

\*The material may be changed depending on the service temperature.  
Note: Body seats and/or disc seats can be optionally hard-faced.



### Items

Face-to-Face Dimensions	KITZ Std.
End Flange Dimensions	ASME B16.5
Wall Thickness	ASME B16.34 Class 150

Nominal Size	1/2 x 1 1/2		3/4 x 1 1/2		1 x 2		1 1/2 x 2 1/2	
		15 x 40		20 x 40		25 x 50		40 x 65
L	in.	6.00		6.00		7.50		8.40
	mm	152		152		190		213
H (open)	in.	2.9		2.9		2.9		3.5
	mm	73		73		73		90
P		Rc 1/2		Rc 1/2		Rc 1/2		Rc 1/2

\*The nominal sizes are indicated by [the valve nominal sizes] and [flange nominal sizes].