



KITZ Corporation Of America  
800-772-0073 • www.KITZ.com

Design - B16.34, OS&Y, BB, RFF, Swivel Type Plug Disc, LEV - 100 PPM max.  
Wall Thickness - API 600  
Body Materials - ASTM A351, A494, A890, A990, others upon request


**Class 900**

**GLOBE VALVE**

Pressure-Temperature Rating: ASME B 16.34

900UPC

900UPCM

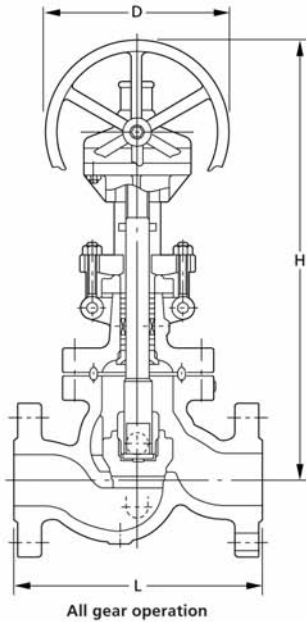

**Materials**

Parts	900UPC	900UPCM
Body*	CF8	CF8M
Bonnet	CF8	CF8M
Stem	304	316
Disc*	CF8	CF8M
Lock nut	CF8	CF8M
Gland	304	316
Gland flange	CF8	
Gland packing	Refer to Page 10	
Gasket	Refer to Page 10	
Yoke**	CF8	
Yoke bush	Ductile Ni-resist	
Handwheel	Ductile iron	
Gland bolt/nut	B8/8	
Gland bolt pin	403	
Bonnet bolt/nut	B8/8	
Name plate	304	

\*Body seats and/or disc seats can be optionally hard-faced.

\*\*Yoke is separated from bonnet for size 4 and larger.

Note: All integral seats

Items	
Face-to-Face Dimensions	ASME B16.10
End Flange Dimensions	ASME B16.5
Wall Thickness	API 600 Class900

Nominal Size	3			4			6		
		80		100		150			
L	in.	15.00		18.00		24.00			
	mm	381		457		610			
H (open)	in.	34.6		36.7		46.1			
	mm	880		933		1171			
D	in.	19.7		19.7		23.6			
	mm	500		500		600			